




SHACMAN

OPTIMIZED

X

SERIES



Euro 5
Compliant

Supported By
YONMING GROUP
44 Years Of Experience
In Spare Parts &
Services

AFTER SALES SERVICE TEAM
Over 38 Branches
Nationwide

24/7
365 DAYS
RES-Q
TEAM



+

+

+

+

Euro 5
Compliant



+

+

+


COMFORT and STYLE

Leveraging modern technology, one may work in comfort and style. Improved noise isolation and expanded cabin space.





Gen-II Integrated AMT Transmission
二代集成AMT变速箱

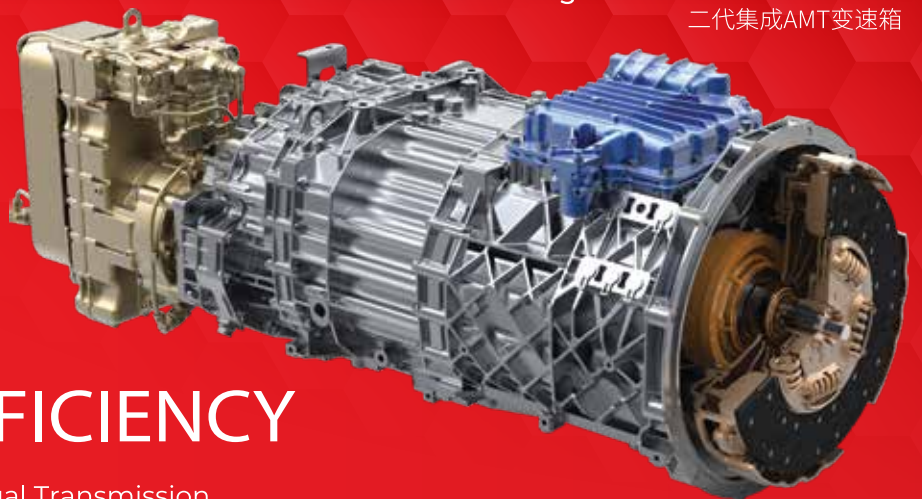


power EFFICIENCY

- ● ● AMT - Automated Manual Transmission
- ● ● allows the X-series to effortlessly attain even
- ● ● greater efficiency and performance.




Dimensions

4x2

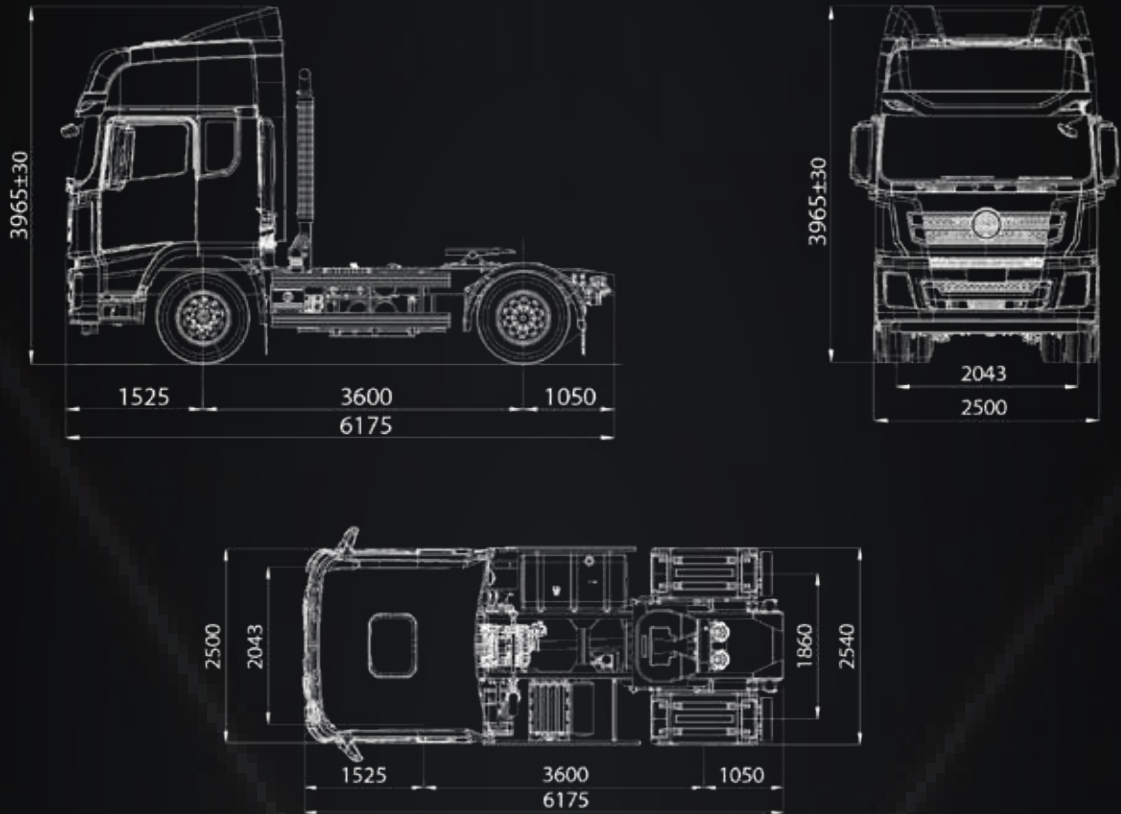

Dimensions

6x2 | 6x4

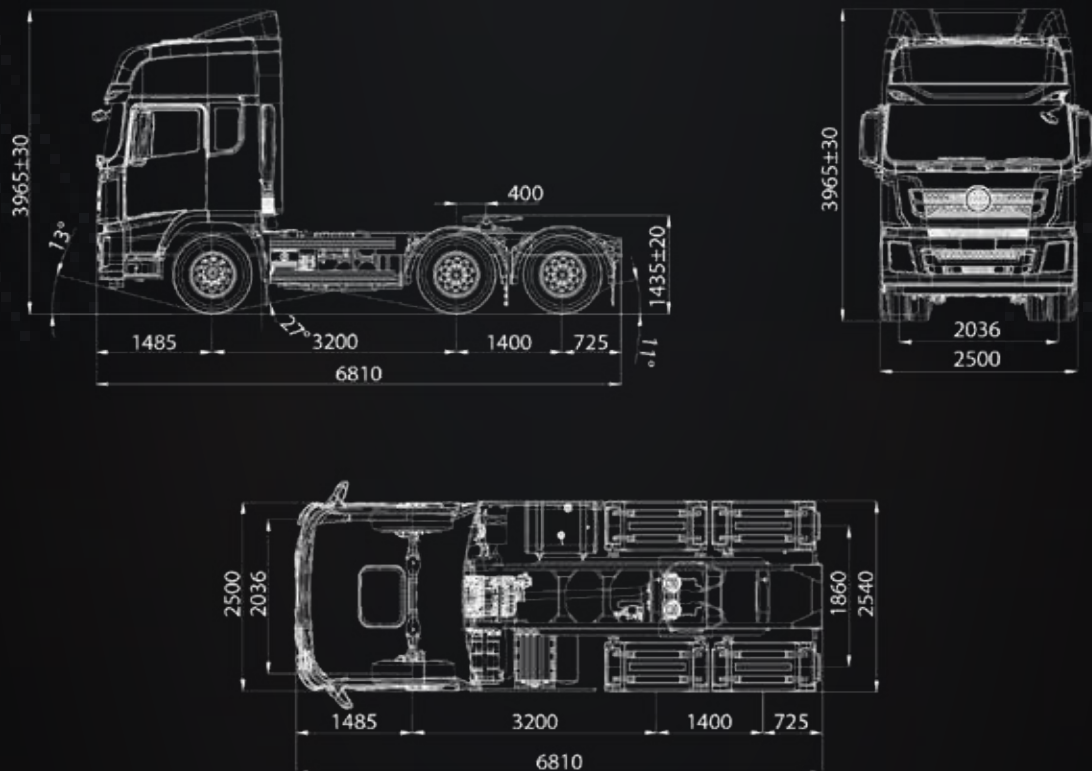

Model	X Series	X Series	X Series
Drive Type	4 x 2 (400 HP)	6 x 2 / 6 x 4 (460 HP)	6 x 4 (550 HP)
Weight			
Complete kerb mass (kg)	7800	10150	10500
GVW (kg)	23000	33000	33000
GCW (kg)	60000	76000	91000
Dimensions			
Max. length (mm)	6175	6810	6810
Max. width (mm)	2500	2500	2490
Max. height (mm)	3965	3965	3560
Front/Rear overhang (chassis)	1525/1050	1485/725	1485/725
Wheel base (mm)	3600	3200+1400	3200+1400
Track width (mm)	2043 + 1860	2036 + 1860	2036 + 1860
Performance			
Max. speed (km/h)	110	110	110
Min.turning circle (m)	15	14 / 16	14 / 16
Min.ground clearance (mm)	291	291	291
Approach / Departure angle (°)	20/20	20/20	20/20
Max.gradeability (%)	34	34	34
Engine			
Brand	Weichai Power Co.,Ltd.	Weichai Power Co.,Ltd.	Weichai Power Co.,Ltd.
Model	WP12	WP12	WP13
Power (kw/HP)	289/400 at 1900 rpm	333/460 at 1900 rpm	400/550 at 1900 rpm
Max. Torque (N.m)/rpm	1920/1000 ~1400	2110/1000 ~1400	2550/1000 ~1400
Displacement (L)	11596	11596	12540
Bore/Stroke (mm)	126/155	126/155	126/165
Transmission			
Brand & Model	FAST AMT 16 Speed	FAST AMT 16 Speed	FAST AMT 16 Speed
Control type	Automatic (Manual Optional)	Automatic (Manual Optional)	Automatic (Manual Optional)
Gear Shift	16-Forward and 2 Reverse Speeds	16-Forward and 2 Reverse Speeds	16-Forward and 2 Reverse Speeds
Clutch			
Type	Single plate, diaphragm spring	Single plate, diaphragm spring	Single plate, diaphragm spring
Diameter (mm)	Ø430	Ø430	Ø430
Brakes			
Type	Drum	Drum	Drum
Service brake	With dual - circuit Compressed air brake	With dual - circuit Compressed air brake	With dual - circuit Compressed air brake
Park brake	Power spring brake acting on rear wheel	Power spring brake acting on rear wheel	Power spring brake acting on rear wheel
Auxiliary brake	WEVB, WABCO ABS	WEVB, WABCO ABS	WEVB, WABCO ABS
Option	NIL	NIL	NIL
Steering			
Type	Integral circulating ball power steering	Integral circulating ball power steering	Integral circulating ball power steering
Option	BOSCH	BOSCH	BOSCH
Chassis			
Type	Ladder structure, widened and cross - section variable	Ladder structure, widened and cross - section variable	Ladder structure, widened and cross - section variable
Suspension			
Front Suspension	Longitudinal leaf spring	Longitudinal leaf spring	Longitudinal leaf spring
Rear Suspension	Inverted leaf spring stabilizator suspension	Inverted leaf spring stabilizator suspension	Inverted leaf spring stabilizator suspension
Axle			
Brand	HANDE	HANDE	
Front Axle	7500kgs	7500kgs / 9500kgs	
Rear Axle	13000KG Double reduction driving axle with inter-wheel differential and differential lock.	13000KG / 16000KG Double reduction driving axle with inter-wheel differential and differential lock.	
Option	Spring / Air Suspension	6 x 2 - Spring / Air Suspension	
Tyres			
Type (Standard)	295 / 80R 22.5	295 / 80R 22.5	295 / 80R 22.5
Fueltank			
Tank capacity (L)	500	500	500
Material	Aluminium	Aluminium	Aluminium
Electrics			
Type	24V	24V	24V
Starter	5.58kw (24V)	5.58kw (24V)	5.58kw (24V)
Generator	2.2kw (28V 70A)	2.2kw (28V 70A)	2.2kw (28V 70A)
Battery	2 X 180Ah	2 X 180Ah	2 X 180Ah
Cab			
Type	X Series, High Cab		
Equipments	2 Rear Window Glass, (4) Point Air Suspension Cab, Air Conditioner, Mechanical Chair with Seat Belts, one Sleeping Bed, Electric Power Window, Electric Heated Door Mirror & Radio Only		
Option	SHACMAN Telematics, GPS Tachograph, 360 Degree Camera, Lane Departure Warning (LDW), Rooftop Air Conditioning, & Rain-sensing Windshield		




SHACMAN

陕汽重卡

SHAANXI TRUCKS SDN BHD

A Member of YONMING® GROUP

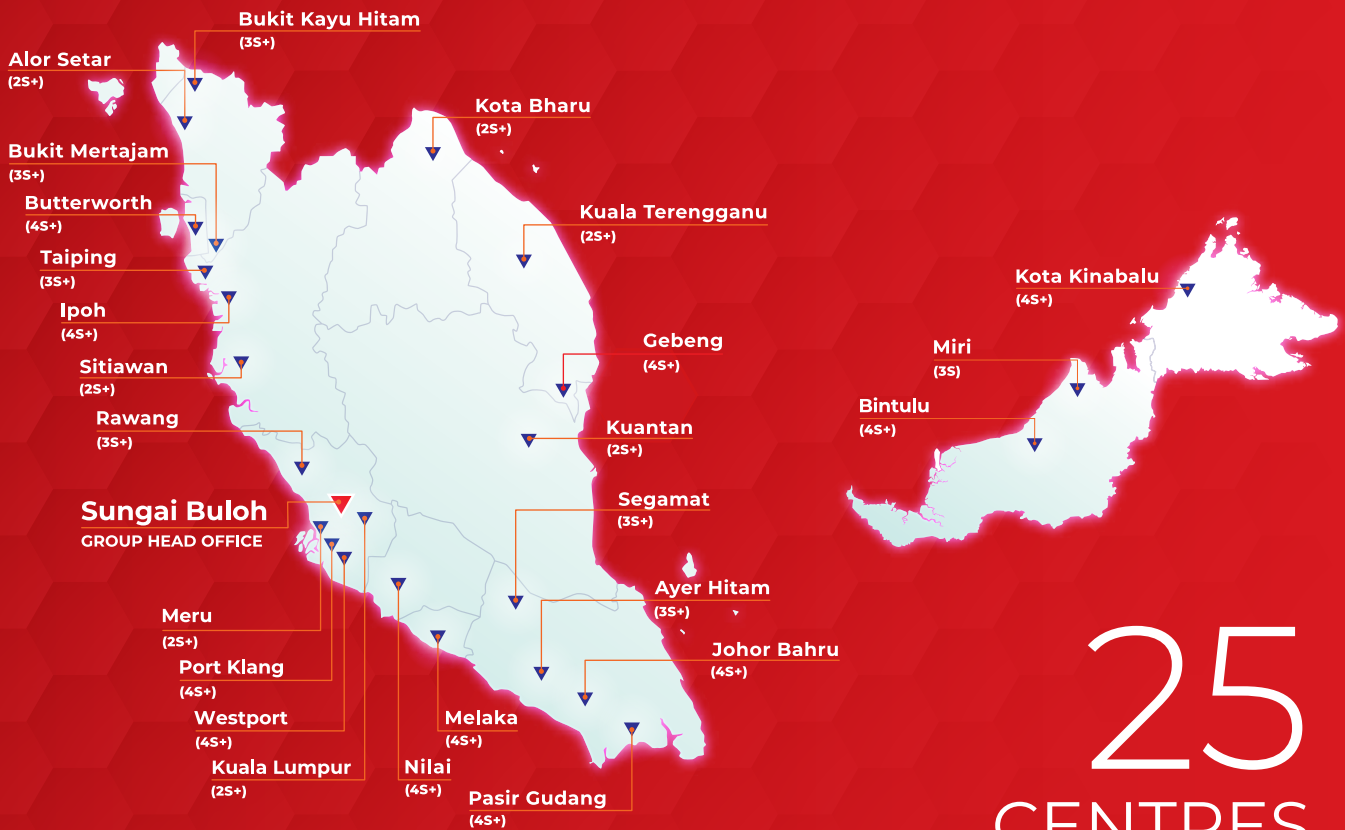

25 CENTRES



4 2S Centre 10 3S Centre 11 4S Centre

(2S) Component Part Sales
Safety & Truck Equipment Sales
(+) Outdoor Breakdown Services

(3S) Component Part Sales
Safety & Truck Equipment Sales
Maintenance Services

(4S) Component Part Sales
Safety & Truck Equipment Sales
Maintenance Services
Truck Sales

CONTACT US

Lot 63857, No.25 Lorong, Jalan Jala 14/Ks10, Telok Gong,
42000 Port Klang, Selangor, Malaysia.



+603 3163 1953

+6012 282 2948

sts@yonming.com

www.shacman.com.my